

## Dynamic range of direct-sampling receivers (SDR)

Figure 1 shows the IMD3-History from a 16Bit direct-sampling SDR, the SunSDR2Pro. The red numbers along the DR3-curve (blue) show the calculated Dynamic-Range at  $DR3 = P_i - IMD3$ .

When increasing the 2-tone input signal the first IMD3 product appears with 3dB above noise at a level of  $P_i = 2x-60dBm$ . The calculated dynamic range at this point is  $DR3 = P_i - IMD3 = -60dBm - (-130dBm) = 70dB$ . That's the receiver "worst case" dynamic range.

To take this "70dB" as the receiver "Dynamic Range" is not correct, as Rob Sherwood does it in his "Receiver Comparison List" (<http://www.sherweng.com/table.html>). Rob compares the min. dynamic range of direct-sampling receivers with the max. dynamic range of analog receivers. In contrast to analog receivers, the dynamic range of direct-sampling receivers does not decrease by increasing the input level, but raise. At a level of  $P_i = 2x-20dBm$  the SDR shows its highest dynamic range of 105dB. That's the receivers "best case" dynamic range!

As a result we get an IMD3-free Dynamic-Range from 70dB...105dB. What dynamic range should we announce in a comparison list, 70dB, 88dB or 105dB? This example shows once again that a correct dynamic comparison between analog and digital receivers is impossible. The only true answer about the dynamics shows the IMD3-curve.

But if we want to compare the dynamic range of the direct-sampling SDR with analog receivers in a common list, we have to use the max. IMD3-free dynamic range of 105dB, but not 70dB!

Conclusion: It is neither possible nor meaningful to name a simple "dB-value" as the dynamic range of direct-sampling SDR's. The only way to explain the IMD3-free dynamic is to show its IMD3-curve.

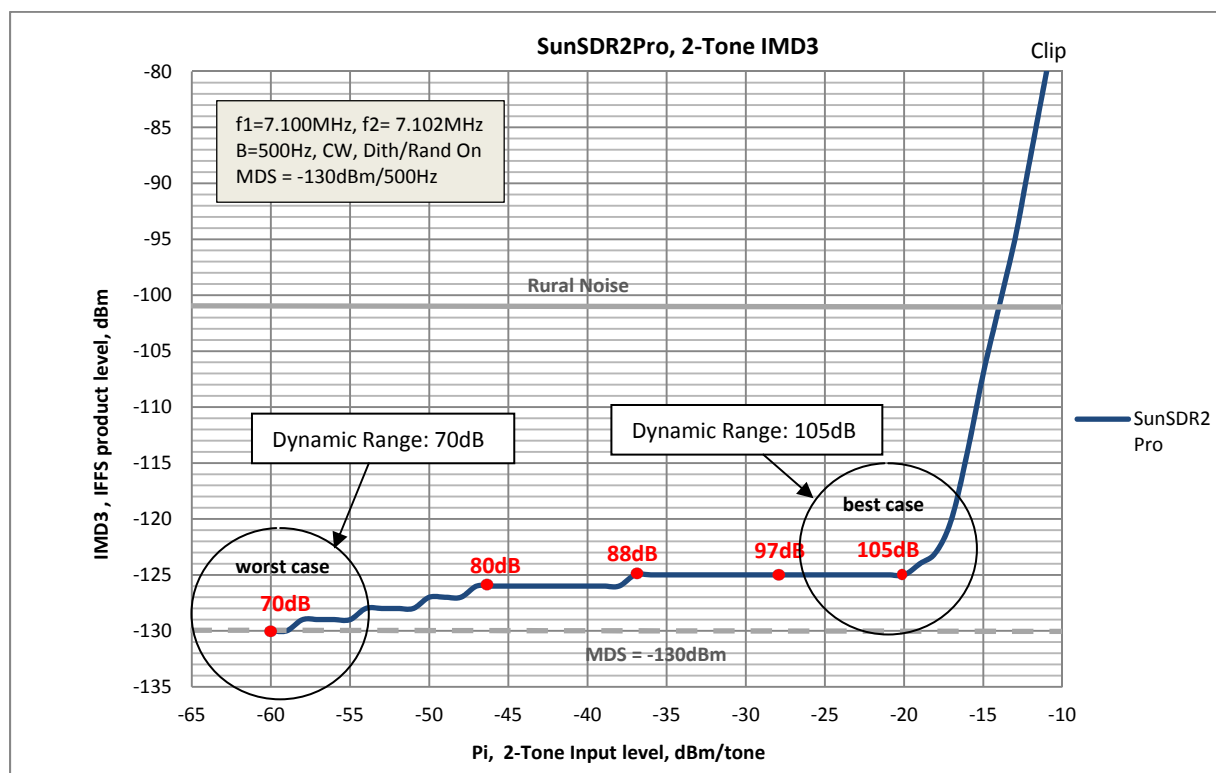


Fig. 1: IMD3-curve of a digital direct-sampling SDR

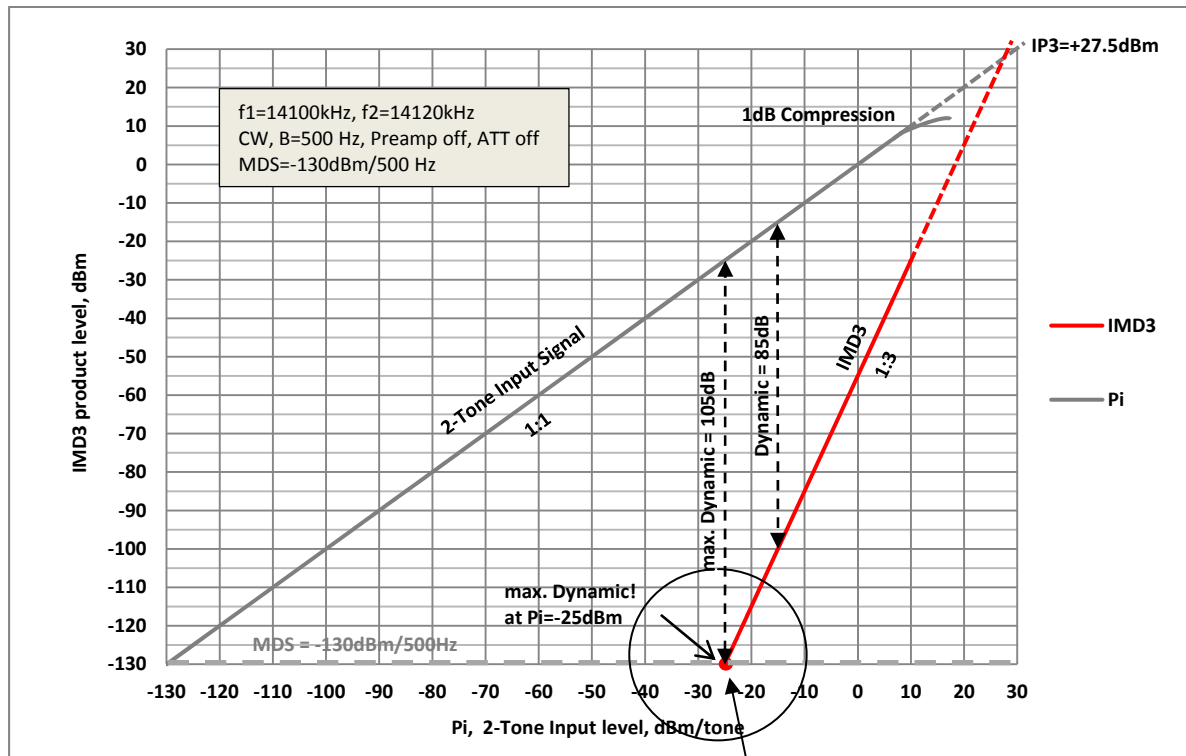


Fig 2: IMD3-curve of an analog receiver

Dynamic Range: 105dB

73, Werner  
DC4KU  
01.03.2021